

KRSXX8X

«Start» 19-inch Network Cabinet



- ✓ Hinged doors with 180° opening
- ✓ Side panels with easy access
- ✓ Sliding lock and O'Lock system for panels

The «START» rack from Unikkern is designed to meet the needs of a cable management rack. The optimization of active equipment management allows for efficient ventilation, advanced cable management, and a high load capacity of 650 kg.

Its compatibility with all standard 19-inch accessories facilitates the integration of market-standard equipment. The double perforated front doors ensure optimal airflow, maintaining an ideal temperature for sensitive components. The rear and side panels provide easy access for installation and maintenance. The newly integrated vertical organizer and sliding cable entry allow for organized and flexible cable management, reducing clutter and improving the aesthetics of the installation.

Moreover, the robust construction of the rack supports heavy loads, ensuring the security and stability of critical equipment. Finally, its versatile design allows it to adapt to different IP environments, offering adequate IP20 protection against dust and water intrusion, and meeting the specific requirements of various usage contexts.



Customization options available: Cabinets can be configured with glass and/or perforated front/rear doors as per your needs.



KRSXX8X

«Start» 19-inch Network Cabinet

THE STRUCTURE

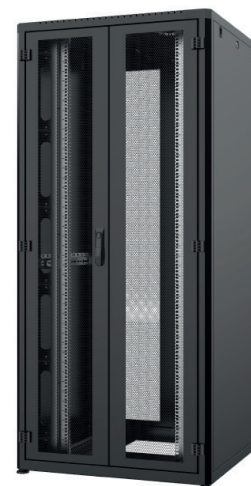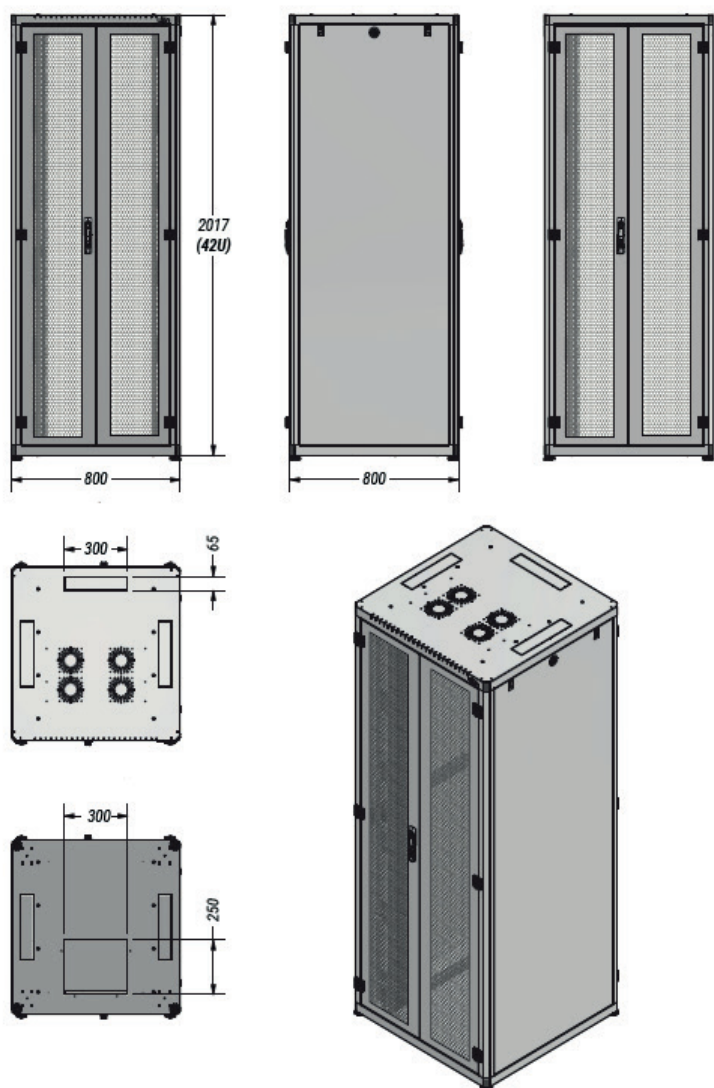

Closed Cabinet



Open Cabinet

Load capacity : 650 KG

Material : Steel

Surface finish : Powder coating

Color: Black Ral 9005

Material thickness : 1.2mm steel

Rack units available (RU) : 27U/ 32U/ 42U

Modular spacing : 19 pouces


IP rating : IP20 (when equipped with a base plate)



KRSXX8X

«Start» 19-inch Network Cabinet

THE STRUCTURE

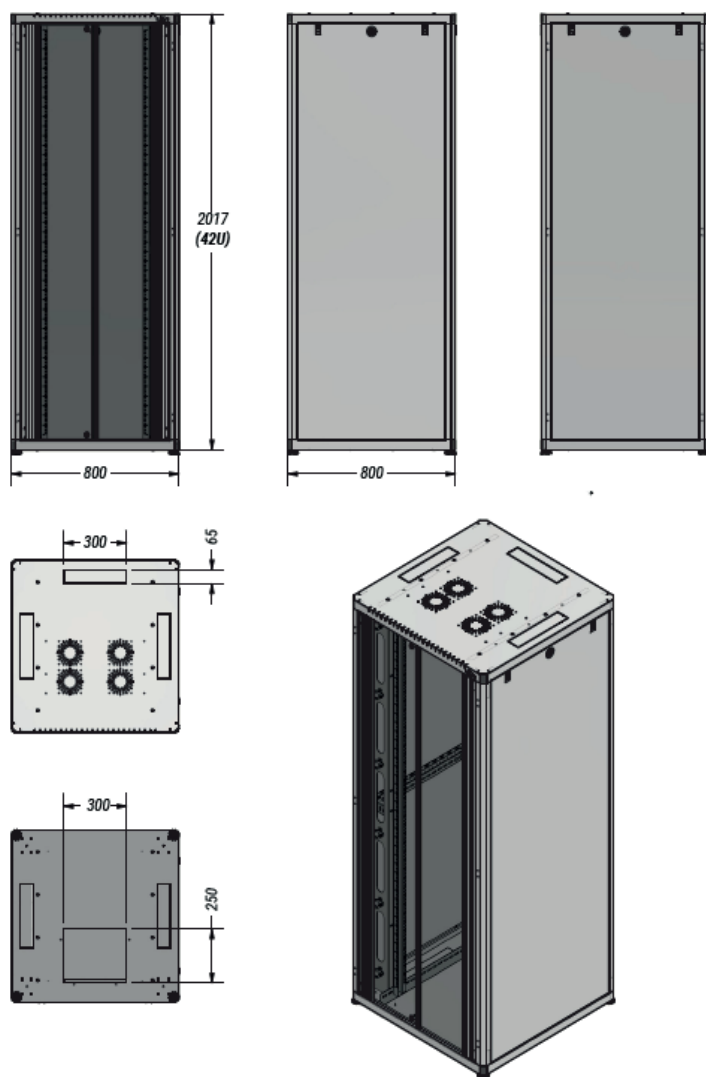

Baie vitrée fermée



Baie vitrée ouverte

Load capacity : 650 KG

Material : Steel

Surface finish : Powder coating

Color: Black Ral 9005

Material thickness : 1.2mm steel

Rack units available (RU) : 27U/ 32U/ 42U

Modular spacing : 19 pouces


IP rating : IP20 (when equipped with a base plate)



KRSXX8X

«Start» 19-inch Network Cabinet


THE STRUCTURE

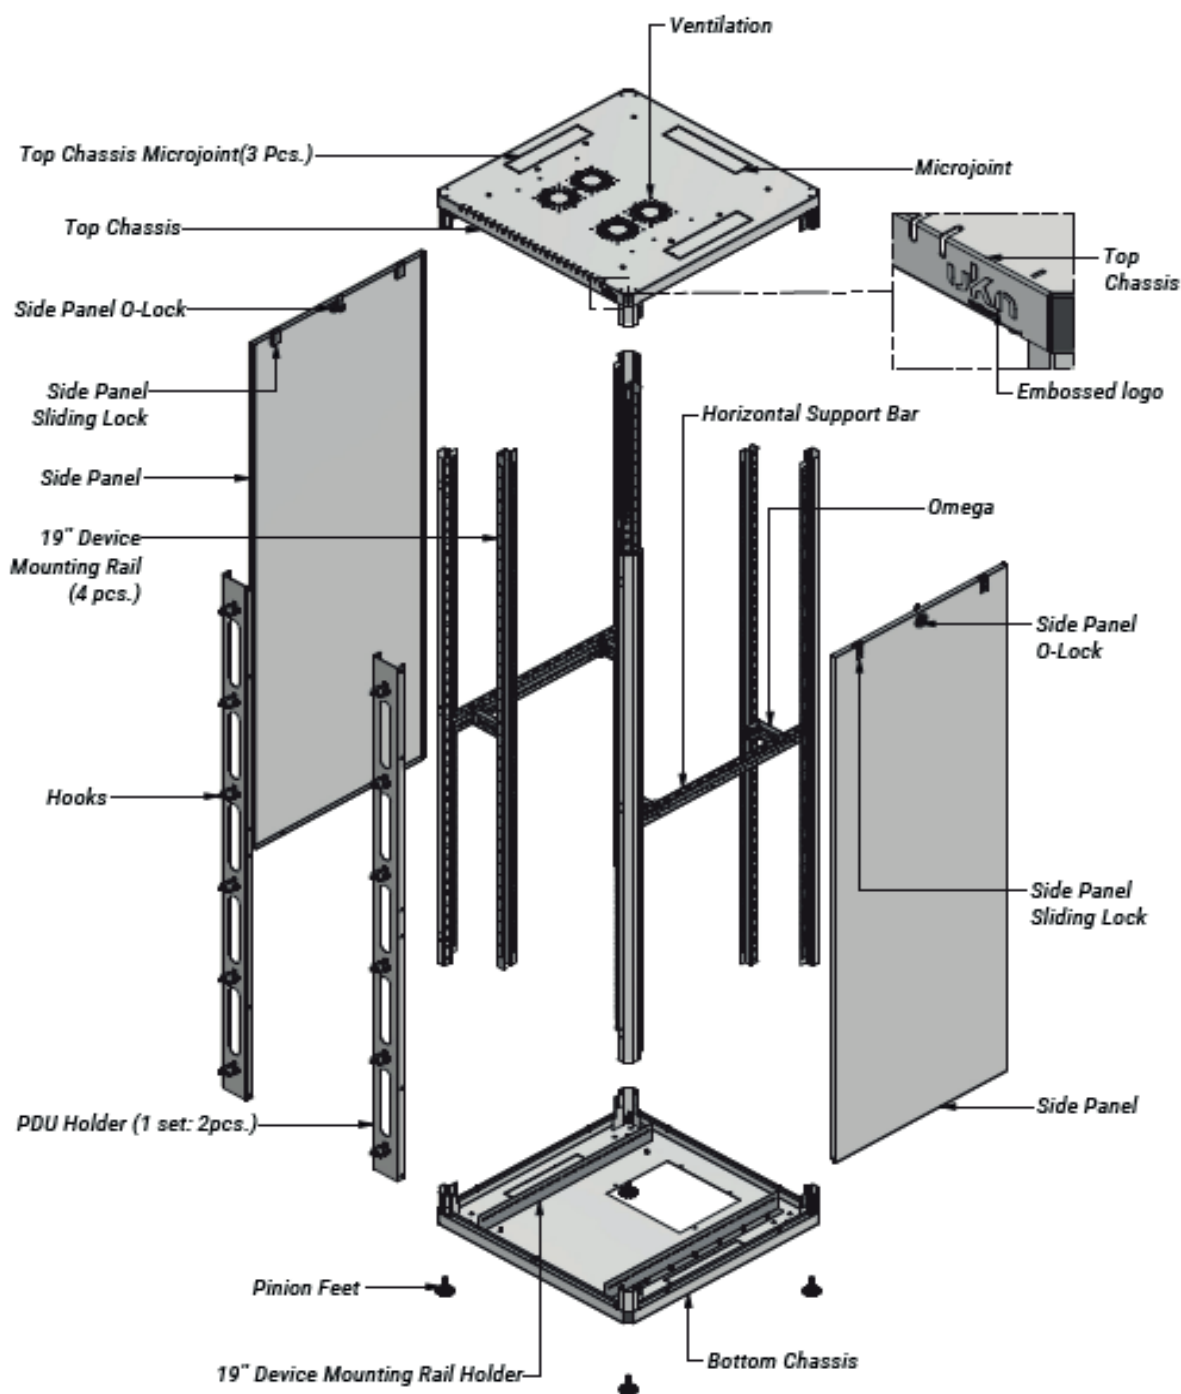

KRSXX8X

«Start» 19-inch Network Cabinet

THE STRUCTURE

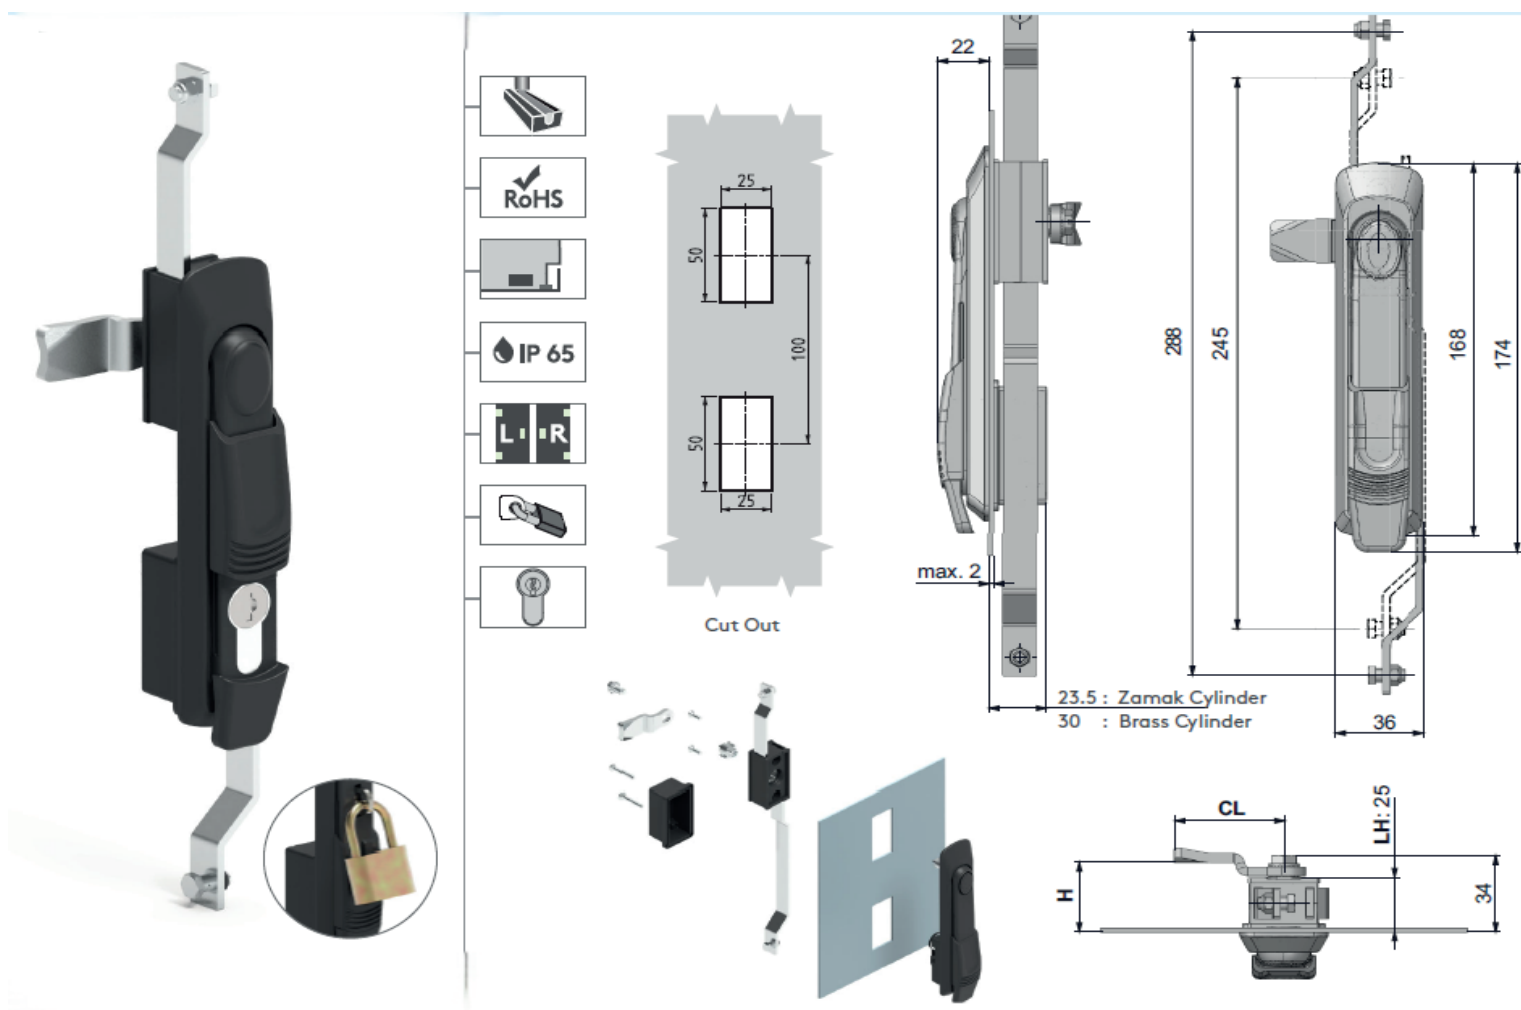

KRSXX8X

«Start» 19-inch Network Cabinet



PURCHASE INFO

Item	Units	Dimension	Designation	Packaging
KRS4286DGR	42U	800x600	“START” 19-inch network cabinet with double front glass doors and rear panel	1 Pc
KRS4286WDR	42U	800x600	“START” 19-inch network cabinet without front door and without rear panel	1 Pc
KRS2788DGR	27U	800x800	“START” 19-inch network cabinet with double front glass doors and rear panel	1 Pc
KRS3288DGR	32U	800x800	“START” 19-inch network cabinet with double front glass doors and rear panel	1 Pc
KRS4288DGR	42U	800x800	“START” 19-inch network cabinet with double front glass doors and rear panel	1 Pc
KRS4288WDR	42U	800x800	“START” 19-inch network cabinet without front door and without rear panel	1 Pc
KRS42810DGR	42U	800x1000	“START” 19-inch network cabinet with double front glass doors and rear panel	1 Pc
KRS42810WDR	42U	800x1000	“START” 19-inch network cabinet without front door and without rear panel	1 Pc
KRS800DGR		800	Double-leaf glass doors for “START” 19-inch network cabinet, 800 mm	1 Pc
KRS800DP		800	Double-leaf perforated doors for “START” 19-inch network cabinet, 800 mm	1 Pc
KRS800R		800	Rear panel for “START” 19-inch network cabinet, 800 mm	1 Pc

